



Corvi®

Spot
Ultra

Flicker Free

Glare Free

Driverless

with plastic heatsink taking sustainability to its peak

Its unique modular design allows wide assortment of

1500 SKUs




Glare Free Ultra Spot System

Coming Soon




Concealed

Lens

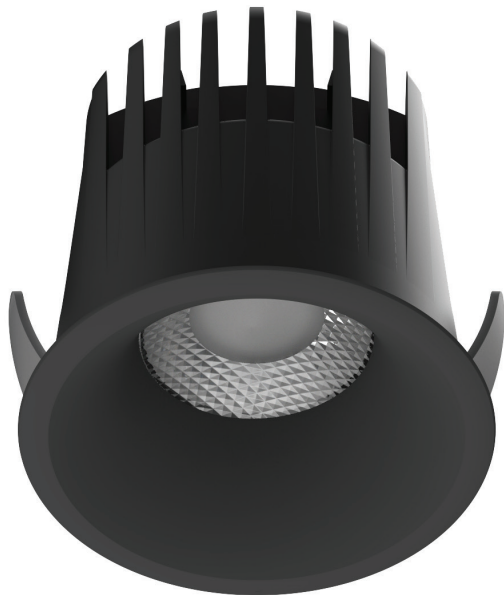

Reflector

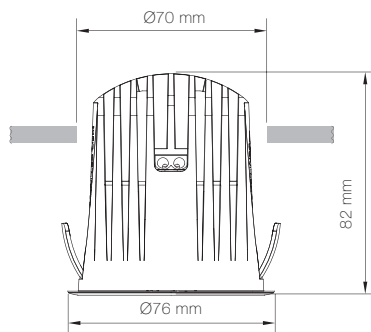


Surface

Lens




Reflector

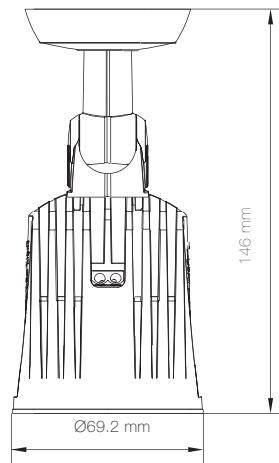


Rimless

Lens

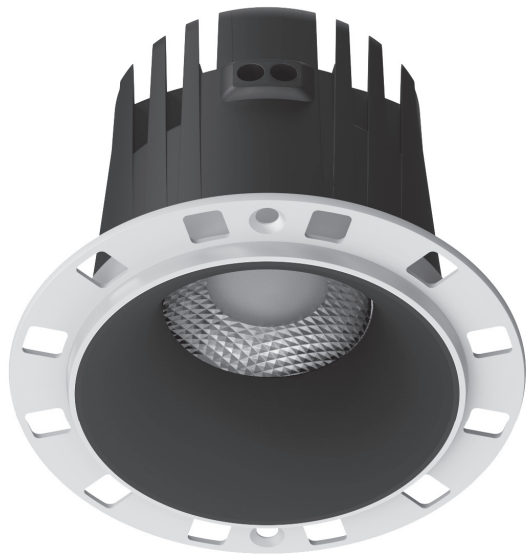


Reflector

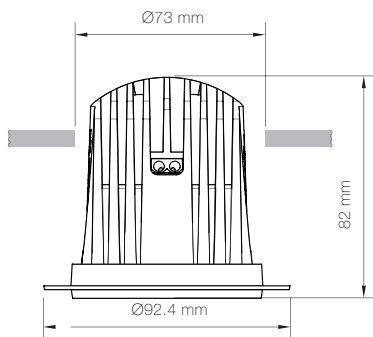

Pendant

Lens

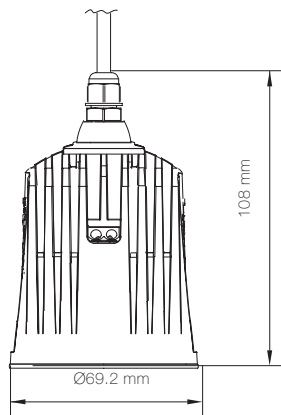

Reflector





TDS Spot 9W & 12W

(Lens 15° / 24° / 36° / 45° / 55°)

(Reflector 15° / 22° / 33° / 60°)

Index	Unit	Specs 9W	Specs 12W
Operating Voltage	V / HZ	200-240V AC, 50/60 Hz	200-240V AC, 50/60 Hz
Surge Protection	KV	5	5
Rated Current	mA	54	67
Power Consumption	W	9	12
Color Temperature CCT	K	3000 / 4000 / 5000	3000 / 4000 / 5000
Luminous Flux	Lm	150lm/W	150lm/W
Color Rendering Index	Ra	Over 90	Over 90
Storage Humidity		20% ~ 70%	20% ~ 70%
Storage Temperature	°C	-40°C ~ +50°C	-40°C ~ +50°C
Operating Temperature	°C	-20°C ~ +50°C	-20°C ~ +50°C
Power Factor		>0.6	>0.6
Type		Indoor	Indoor
IP Rating		IP20	IP20

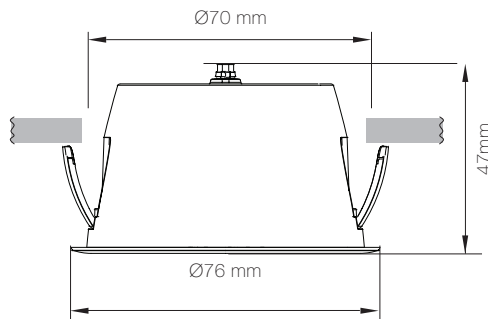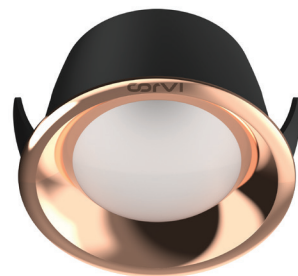

7W



Spot
Ultra



corvi.com • info@corvi.com

Disclaimer

Information specified is subject to revision without prior notice. Lumens efficacy quoted is at the chip level.